

Kailux

Last Update : 2020 . 08


**Code**

E0101-DM (측정용)


**Technical data**

LED Source	COB
Luminous Flux (lm)	4829(5700K)
Power (W)	40(White) + 30(RGB)
Luminous efficiency (lm/W)	116
Beam angle (°)	Symmetry
Color Temperature (K)	3000~6000
CRI	≥80
Installation	-
Dimension (mm)	500 x 697 x 4000
Housing	Cast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Polycarbonate(indicator)
Reflector	-
Optic	Silicone lens
IP rating	65
Finish Color	Dark gray or Silver powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	KS

**Drawing**

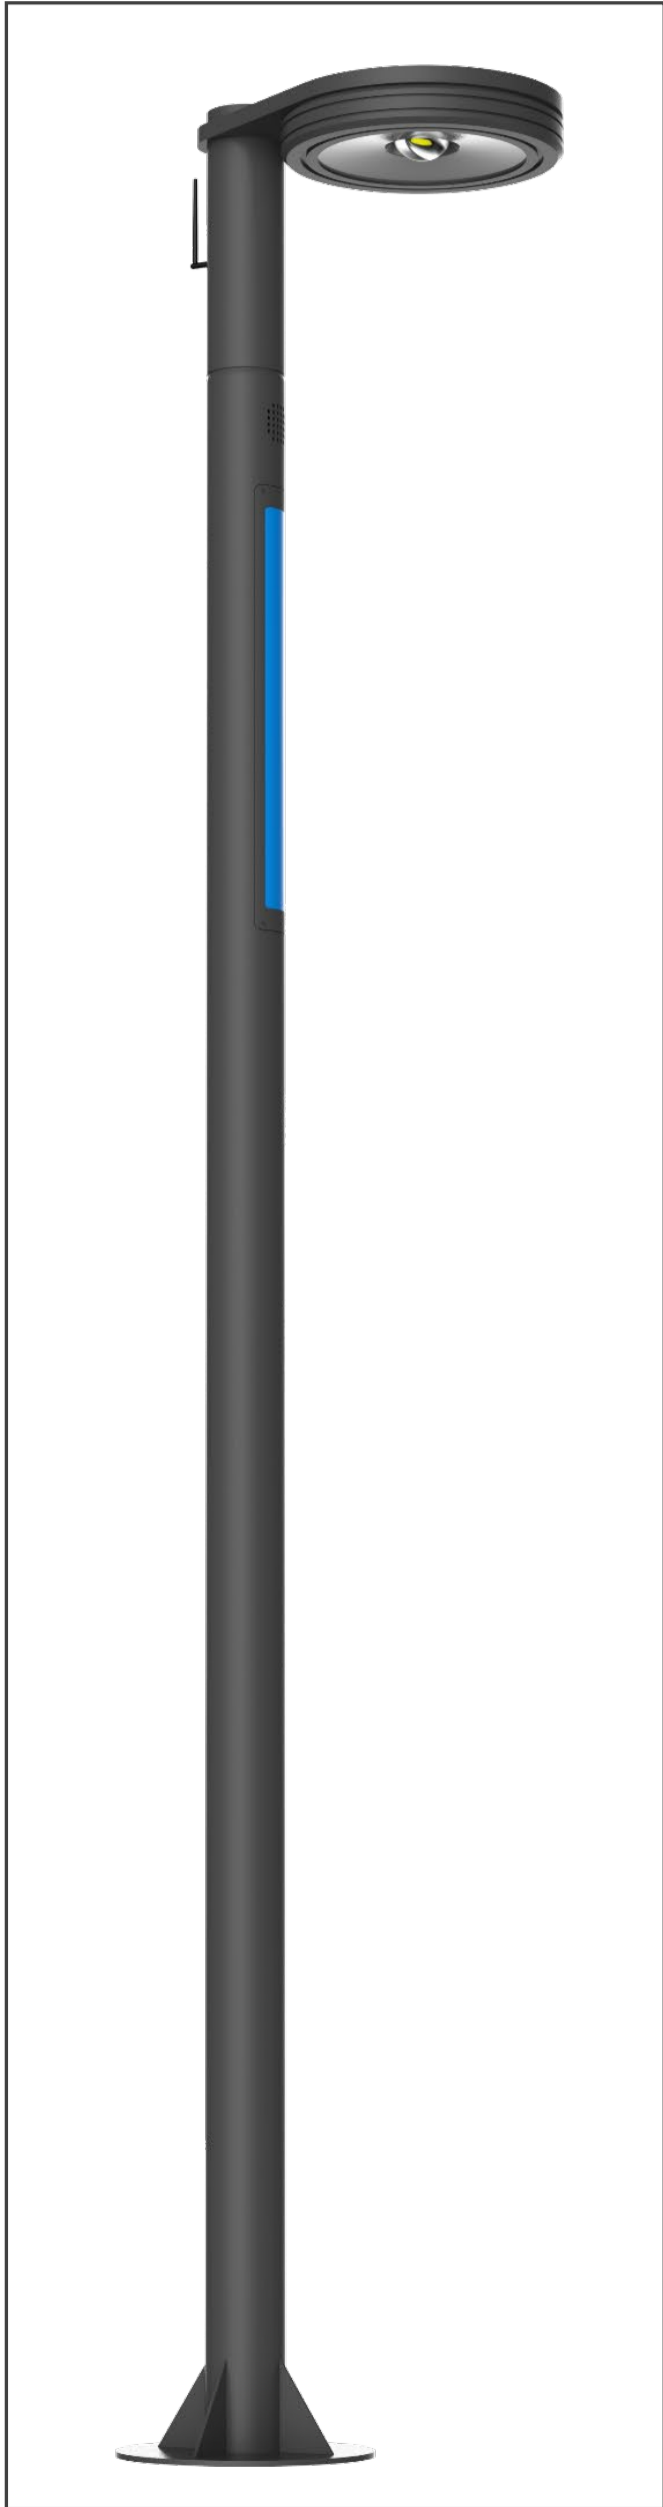

**Photometric Data**

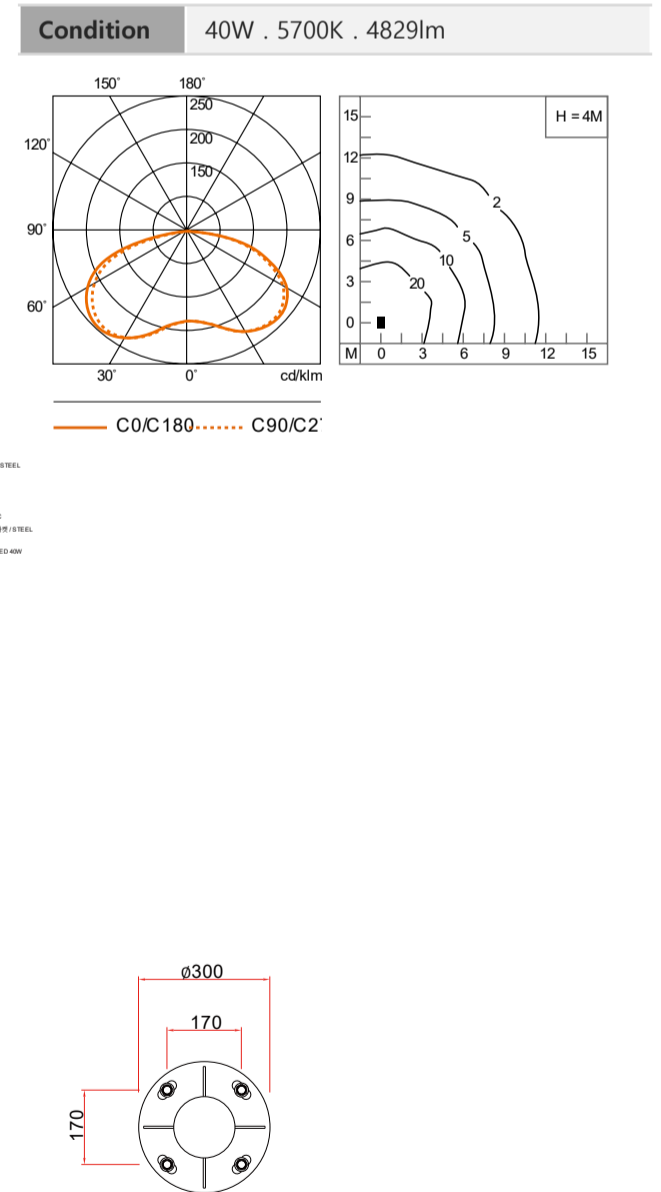


Kailux

Last Update : 2020 . 08


**Code**  
E0101-DS (표시용)

**Technical data**

LED Source	COB
Luminous Flux (lm)	4829(5700K)
Power (W)	40(White) + 30(RGB)
Luminous efficiency (lm/W)	116
Beam angle (°)	Symmetry
Color Temperature (K)	3000~6000
CRI	≥80
Installation	-
Dimension (mm)	500 x 697 x 4000
Housing	Cast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Polycarbonate(indicator)
Reflector	-
Optic	Silicone lens
IP rating	65
Finish Color	Dark gray or Silver powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	KS

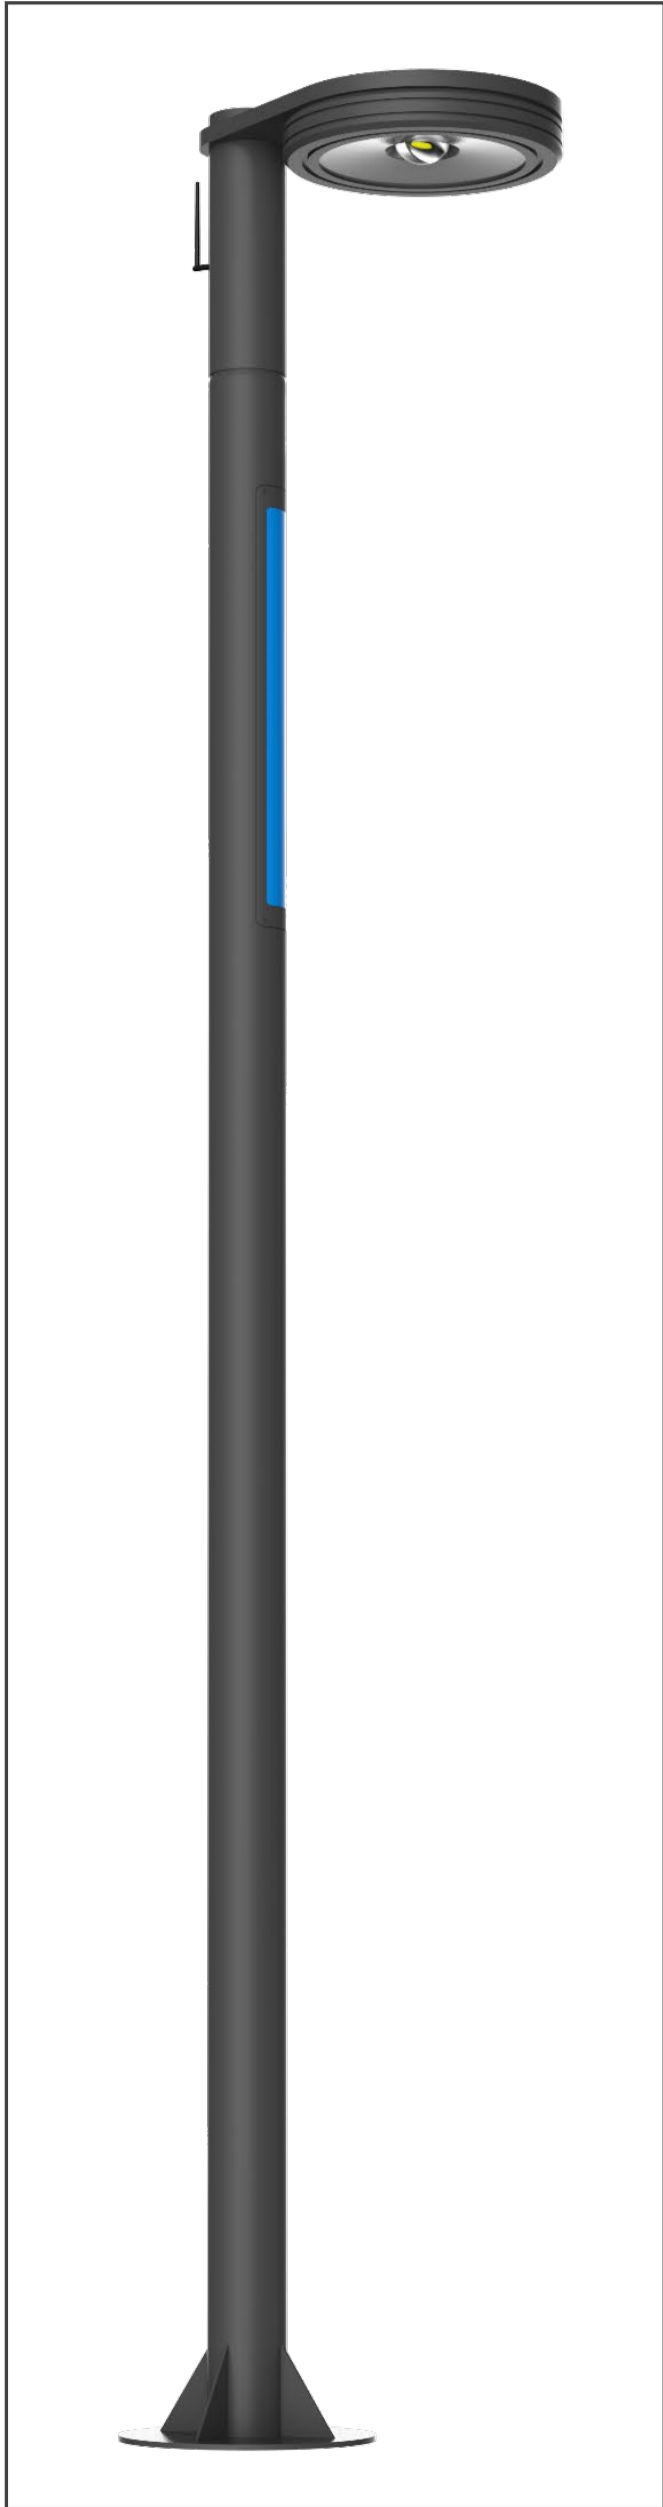

**Drawing**

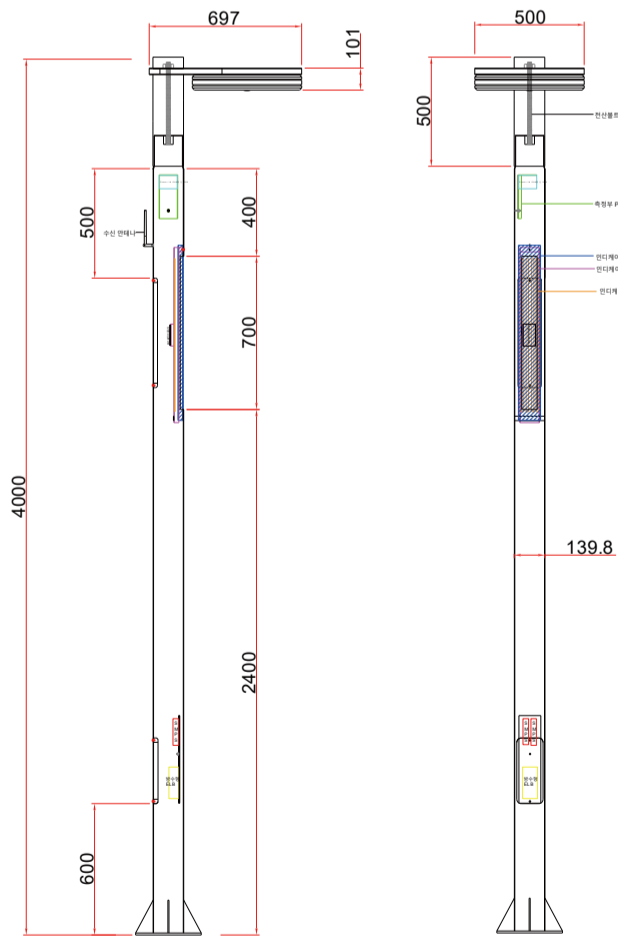

**Photometric Data**

