

Kailux

Last Update : 2023 . 08

**Code**


E0218-10C30Z060 / E0218-10C57Z060

**Technical data**

LED Source	COB
Luminous Flux (lm)	460(3000K)
Power (W)	10
Luminous efficiency (lm/W)	46
Beam angle (°)	-
Color Temperature (K)	3000, 5700
CRI	≥80
Installation	Floor
Dimension (mm)	100 x 600
Housing	Cast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear acrylic
Reflector	-
Socket	-
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	-




**Drawing**

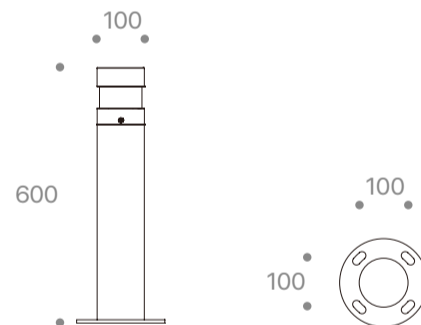

**Photometric Data**

Condition	10W . 3000K . 460lm
-----------	---------------------



E0218  
 — C0C180    ..... C90C270

**Code**


E0218-10C30Z030 / E0218-10C57Z030

**Technical data**

LED Source	COB
Luminous Flux (lm)	460(3000K)
Power (W)	10
Luminous efficiency (lm/W)	46
Beam angle (°)	-
Color Temperature (K)	3000, 5700
CRI	≥80
Installation	Floor
Dimension (mm)	100 x 350
Housing	Cast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear acrylic
Reflector	-
Socket	-
IP rating	65
Finish Color	Dark gray or Silver powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	-




**Drawing**

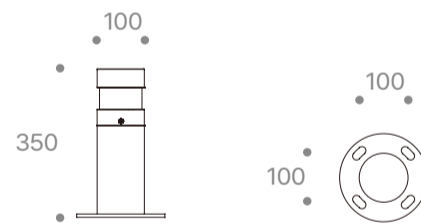

**Photometric Data**

Condition	10W . 3000K . 460lm
-----------	---------------------



E0218-1  
 — C0C180    ..... C90C270

Kailux

Last Update : 2023 . 08

**Code**


E0218-10C30Z060-OP / E0218-10C57Z060-OP

**Technical data**

LED Source	COB
Luminous Flux (lm)	460(3000K)
Power (W)	10
Luminous efficiency (lm/W)	46
Beam angle (°)	-
Color Temperature (K)	3000, 5700
CRI	≥80
Installation	Floor
Dimension (mm)	100 x 600
Housing	Cast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Opal acrylic
Reflector	-
Socket	-
IP rating	65
Finish Color	Dark gray or Silver powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	-




**Drawing**

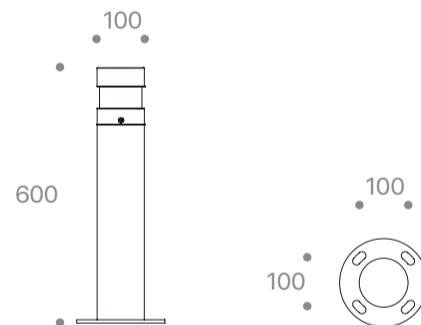

**Photometric Data**

Condition	10W . 3000K . 460lm
-----------	---------------------



E0218-2  
 — C0C180    ..... C90C270

**Code**


E0218-10C30Z030-OP / E0218-10C57Z030-OP

**Technical data**

LED Source	COB
Luminous Flux (lm)	460(3000K)
Power (W)	10
Luminous efficiency (lm/W)	46
Beam angle (°)	-
Color Temperature (K)	3000, 5700
CRI	≥80
Installation	Floor
Dimension (mm)	100 x 350
Housing	Cast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Opal acrylic
Reflector	-
Socket	-
IP rating	65
Finish Color	Dark gray or Silver powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	-




**Drawing**

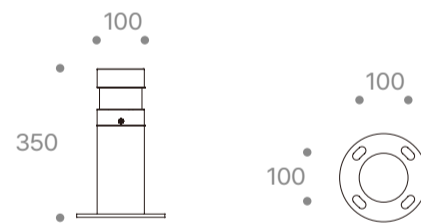

**Photometric Data**

Condition	10W . 3000K . 460lm
-----------	---------------------



E0218-3  
 — C0C180    ..... C90C270