


**Kailux**

Last Update : 2020 . 08


**Code**  
E0413-14S30Z000

**Technical data**

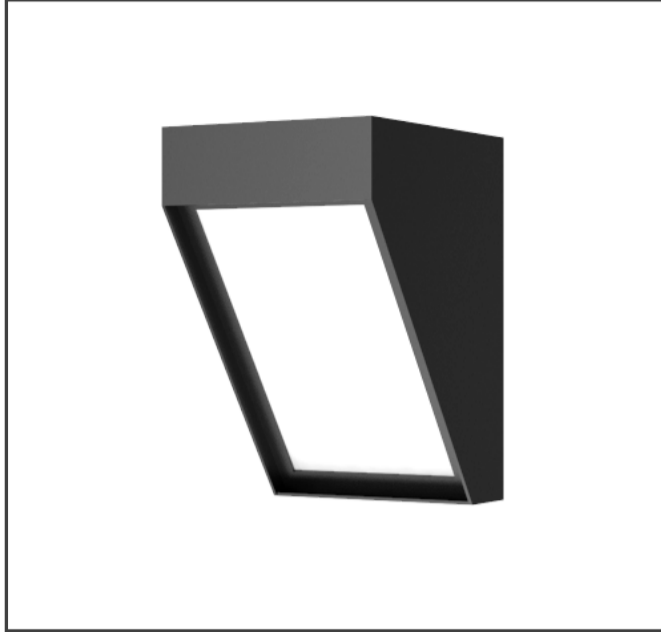

LED Source	SMD
Luminous Flux (lm)	1006(3000K)
Power (W)	14
Luminous efficiency (lm/W)	71
Beam angle (°)	-
Color Temperature (K)	3000~6000
CRI	≥80
Installation	Wall
Dimension (mm)	130 x 155 x 210
Housing	Aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Opal polycarbonate
Reflector	-
Optic	-
IP rating	54
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	KS

**Drawing**

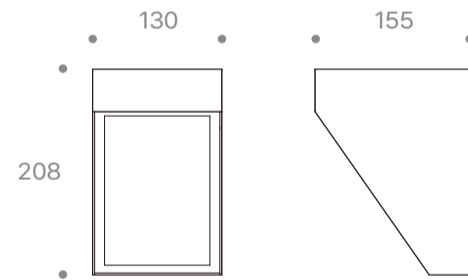


**Kailux**

Last Update : 2020 . 08

**Code**  
E0413-14S30Z000GR

**Technical data**

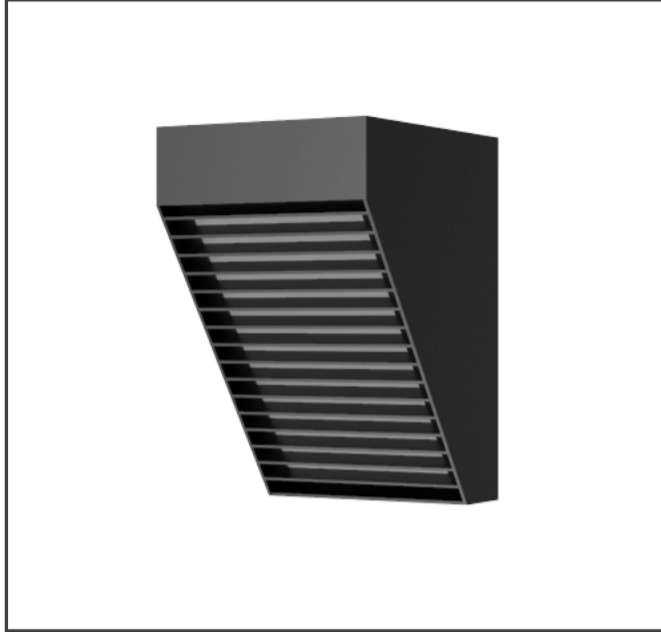

LED Source	SMD
Luminous Flux (lm)	450(3000K)
Power (W)	14
Luminous efficiency (lm/W)	32
Beam angle (°)	-
Color Temperature (K)	3000~6000
CRI	≥80
Installation	Wall
Dimension (mm)	130 x 155 x 210
Housing	Aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Opal polycarbonate, Grill cover
Reflector	-
Optic	-
IP rating	54
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	KS

**Drawing**

