

Kailux

Last Update : 2023 . 08


Code
E0615-9

Technical data




LED Source	SMD
Luminous Flux (lm)	5040(5700K)
Power (W)	72
Luminous efficiency (lm/W)	70
Beam angle (°)	15, 30, 45, 60, 15 x 45, 10 x 60
Color Temperature (K)	3000, 4000, 5700
CRI	≥80
Installation	Floor, Wall, Ceiling
Dimension (mm)	146 x 435 x 148
Housing	Diecast & Extruded aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Optic	PMMA
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	-

Drawing

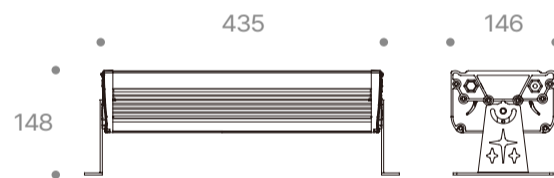

Photometric Data

Condition 72W . 5700K . 5040lm



E0615-9

— C0C180

Kailux

Last Update : 2023 . 08


Code
E0615-10

Technical data



LED Source	SMD
Luminous Flux (lm)	-
Power (W)	72
Luminous efficiency (lm/W)	-
Beam angle (°)	15, 30, 45, 60, 15 x 45, 10 x 60
Color Temperature (K)	RGB
CRI	-
Installation	Floor, Wall, Ceiling
Dimension (mm)	146 x 230 x 148
Housing	Diecast & Extruded aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Optic	PMMA
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	DC 24V
Control	ON / OFF or DMX
Certification	-

Drawing

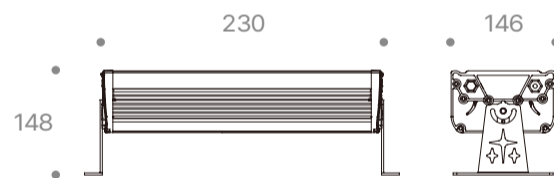

Photometric Data

Condition	-
-----------	---

Kailux

Last Update : 2023 . 08


Code
E0615-11

Technical data



LED Source	SMD
Luminous Flux (lm)	-
Power (W)	72
Luminous efficiency (lm/W)	-
Beam angle (°)	15, 30, 45, 60, 15 x 45, 10 x 60
Color Temperature (K)	RGBW
CRI	-
Installation	Floor, Wall, Ceiling
Dimension (mm)	146 x 230 x 148
Housing	Diecast & Extruded aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Optic	PMMA
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	DC 24V
Control	ON / OFF or DMX
Certification	-

Drawing

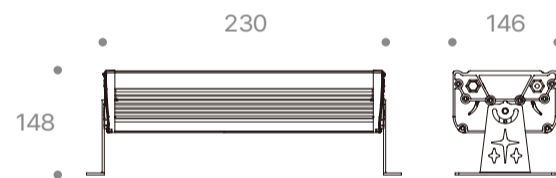

Photometric Data

Condition	-
-----------	---

Kailux

Last Update : 2023 . 08


Code
E0615-12

Technical data




LED Source	SMD
Luminous Flux (lm)	3250(5700K)
Power (W)	55
Luminous efficiency (lm/W)	59
Beam angle (°)	15, 30, 45, 60, 15 x 45, 10 x 60
Color Temperature (K)	3000, 4000, 5700
CRI	≥80
Installation	Floor, Wall, Ceiling
Dimension (mm)	146 x 340 x 148
Housing	Diecast & Extruded aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Optic	PMMA
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	-

Drawing

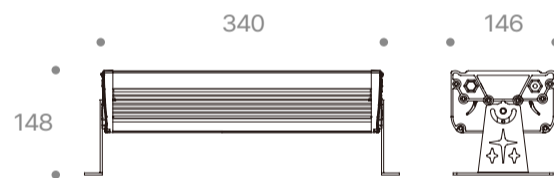

Photometric Data

Condition 55W . 5700K . 3250lm



E0615-12

— COC180

Kailux

Last Update : 2023 . 08


Code
E0615-13

Technical data



LED Source	SMD
Luminous Flux (lm)	-
Power (W)	55
Luminous efficiency (lm/W)	-
Beam angle (°)	15, 30, 45, 60, 15 x 45, 10 x 60
Color Temperature (K)	RGB
CRI	-
Installation	Floor, Wall, Ceiling
Dimension (mm)	146 x 230 x 148
Housing	Diecast & Extruded aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Optic	PMMA
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	DC 24V
Control	ON / OFF or DMX
Certification	-

Drawing

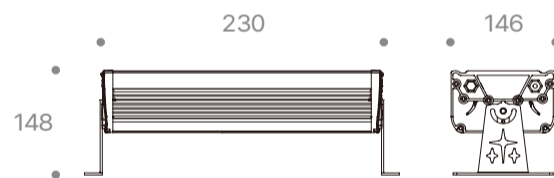

Photometric Data

Condition	-
-----------	---

Kailux

Last Update : 2023 . 08


Code
E0615-14

Technical data



LED Source	SMD
Luminous Flux (lm)	-
Power (W)	55
Luminous efficiency (lm/W)	-
Beam angle (°)	15, 30, 45, 60, 15 x 45, 10 x 60
Color Temperature (K)	RGBW
CRI	-
Installation	Floor, Wall, Ceiling
Dimension (mm)	146 x 230 x 148
Housing	Diecast & Extruded aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Optic	PMMA
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	DC 24V
Control	ON / OFF or DMX
Certification	-

Drawing

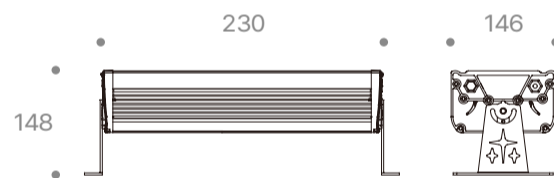

Photometric Data

Condition	-
-----------	---

Kailux

Last Update : 2023 . 08


Code
E0615-15

Technical data




LED Source	SMD
Luminous Flux (lm)	2520(5700K)
Power (W)	36
Luminous efficiency (lm/W)	70
Beam angle (°)	15, 30, 45, 60, 15 x 45, 10 x 60
Color Temperature (K)	3000, 4000, 5700
CRI	≥80
Installation	Floor, Wall, Ceiling
Dimension (mm)	146 x 270 x 148
Housing	Diecast & Extruded aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Optic	PMMA
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	-

Drawing

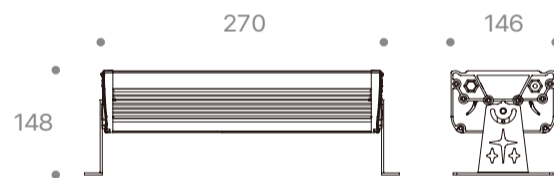

Photometric Data

Condition 36W . 5700K . 2520lm



E0615-15

— C0C180

Kailux

Last Update : 2023 . 08


Code
E0615-16

Technical data



LED Source	SMD
Luminous Flux (lm)	-
Power (W)	36
Luminous efficiency (lm/W)	-
Beam angle (°)	15, 30, 45, 60, 15 x 45, 10 x 60
Color Temperature (K)	RGB
CRI	-
Installation	Floor, Wall, Ceiling
Dimension (mm)	146 x 180 x 148
Housing	Diecast & Extruded aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Optic	PMMA
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	DC 24V
Control	ON / OFF or DMX
Certification	-

Drawing

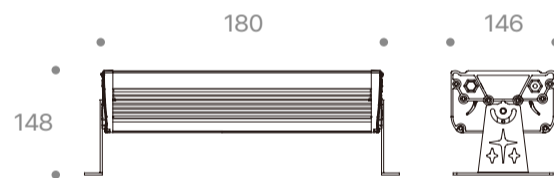

Photometric Data

Condition	-
-----------	---

Kailux

Last Update : 2023 . 08


Code
E0615-17

Technical data



LED Source	SMD
Luminous Flux (lm)	-
Power (W)	36
Luminous efficiency (lm/W)	-
Beam angle (°)	15, 30, 45, 60, 15 x 45, 10 x 60
Color Temperature (K)	RGBW
CRI	-
Installation	Floor, Wall, Ceiling
Dimension (mm)	146 x 180 x 148
Housing	Diecast & Extruded aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Optic	PMMA
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	DC 24V
Control	ON / OFF or DMX
Certification	-

Drawing

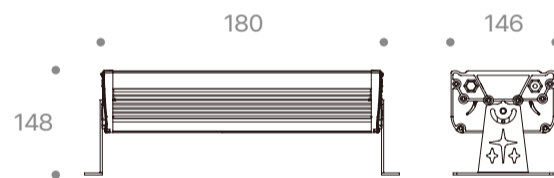

Photometric Data

Condition	-
-----------	---