

Kailux

Last Update : 2023 . 12


Code
E0801-14S30Z000

Technical data



LED Source	SMD
Luminous Flux (lm)	452(3000K)
Power (W)	14
Luminous efficiency (lm/W)	32
Beam angle (°)	-
Color Temperature (K)	3000
CRI	≥80
Installation	Recessed
Dimension (mm)	280 x 220 x 86
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	-
Reflector	-
Optic	-
IP rating	54
Finish Color	Dark gray or Silver powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	KS

Drawing

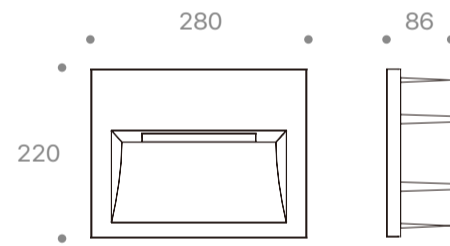


Accessory



Housing box

Photometric Data

Condition	14W . 3000K . 452lm
-----------	---------------------



E0801 / E0802

— CQC180