

Kailux

Last Update : 2023 . 12


Code
E0804-12S30Z000

Technical data


LED Source	SMD
Luminous Flux (lm)	4260(3000K)
Power (W)	12
Luminous efficiency (lm/W)	35
Beam angle (°)	-
Color Temperature (K)	3000
CRI	≥80
Installation	Recessed
Dimension (mm)	200 x 120 x 80
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	-
Reflector	-
Optic	-
IP rating	54
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	KS



Drawing

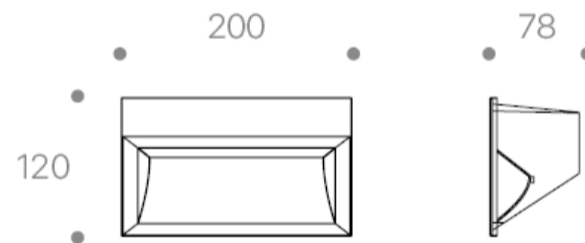


Accessory

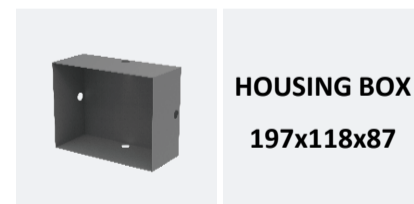

Housing box

Photometric Data

Condition	12W . 3000K . 426lm
-----------	---------------------



E0803 / E0804

— CQC180