

Kailux

Last Update : 2023 . 12


**Code**  
E0406-10S30Z000

**Technical data**




LED Source	SMD
Luminous Flux (lm)	750(3000K)
Power (W)	10
Luminous efficiency (lm/W)	75
Beam angle (°)	-
Color Temperature (K)	3000
CRI	≥80
Installation	Wall & Ceiling
Dimension (mm)	200 x 200 x 60
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Frosted glass
Reflector	-
Optic	-
IP rating	54
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	KS

**Drawing**

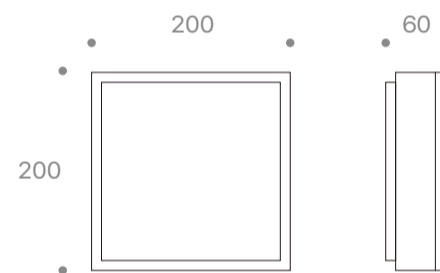

**Photometric Data**

**Condition** 10W . 3000K . 750lm

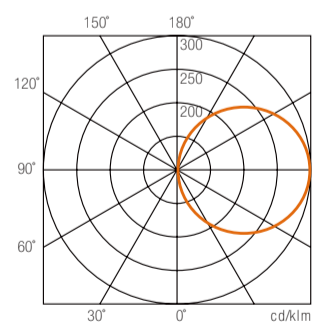

E0407 Series


—COC180

Kailux

Last Update : 2023 . 12

**Code**  
E0407-06S30Z000

**Technical data**

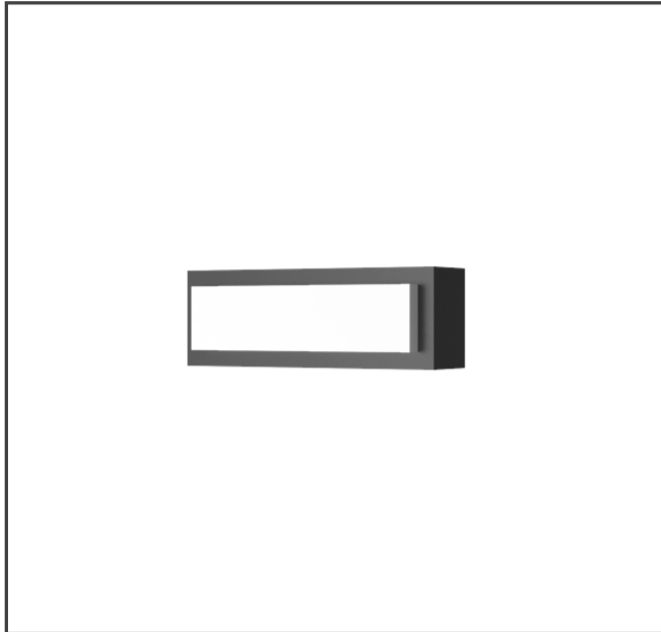


LED Source	SMD
Luminous Flux (lm)	450(3000K)
Power (W)	6
Luminous efficiency (lm/W)	75
Beam angle (°)	-
Color Temperature (K)	3000
CRI	≥80
Installation	Wall & Ceiling
Dimension (mm)	200 x 70 x 60
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Frosted glass
Reflector	-
Optic	-
IP rating	54
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	KS

**Drawing**



**Photometric Data**

**Condition** 6W . 3000K . 450lm

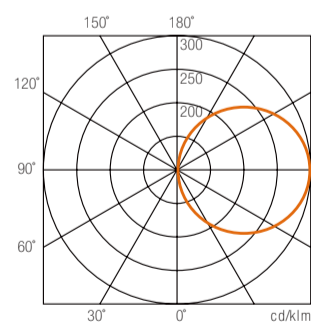

E0407 Series

—COC180