

Kailux

Last Update : 2023 . 12


Code
E0423-20C30Z000

Technical data




LED Source	COB
Luminous Flux (lm)	3546(3000K)
Power (W)	20
Luminous efficiency (lm/W)	177
Beam angle (°)	Asymmetry
Color Temperature (K)	3000
CRI	≥80
Installation	Wall
Dimension (mm)	150 x 110 x 166
Housing	Aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	-
Reflector	-
Optic	Silicone lens
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	KS

Drawing

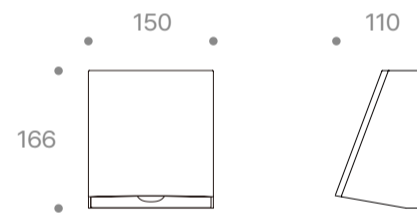

Photometric Data

Condition	20W . 3000K . 3546lm
-----------	----------------------

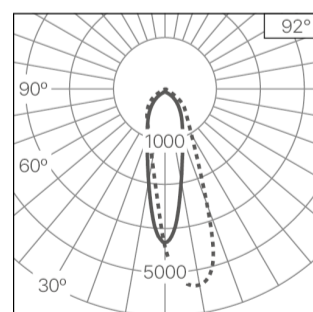

Kailux

Last Update : 2023 . 12


Code
E0424-40C30Z000

Technical data



LED Source	COB
Luminous Flux (lm)	3546 x 2(3000K)
Power (W)	20 x 2
Luminous efficiency (lm/W)	177
Beam angle (°)	Asymmetry
Color Temperature (K)	3000
CRI	≥80
Installation	Wall
Dimension (mm)	300 x 110 x 166
Housing	Aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	-
Reflector	-
Optic	Silicone lens
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	KS

Drawing

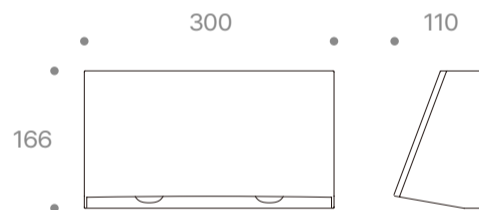

Photometric Data

Condition	20W . 3000K . 2300lm
-----------	----------------------

